

§2. DESCRIPTION OF THE SUBJECT OF THE ORDER

I) GENERAL SPECIFICATIONS

1. Brake dynamometer location

Brake dynamometer has to be placed in existing BOSMAL location with the dimensions pictured on figure 2.

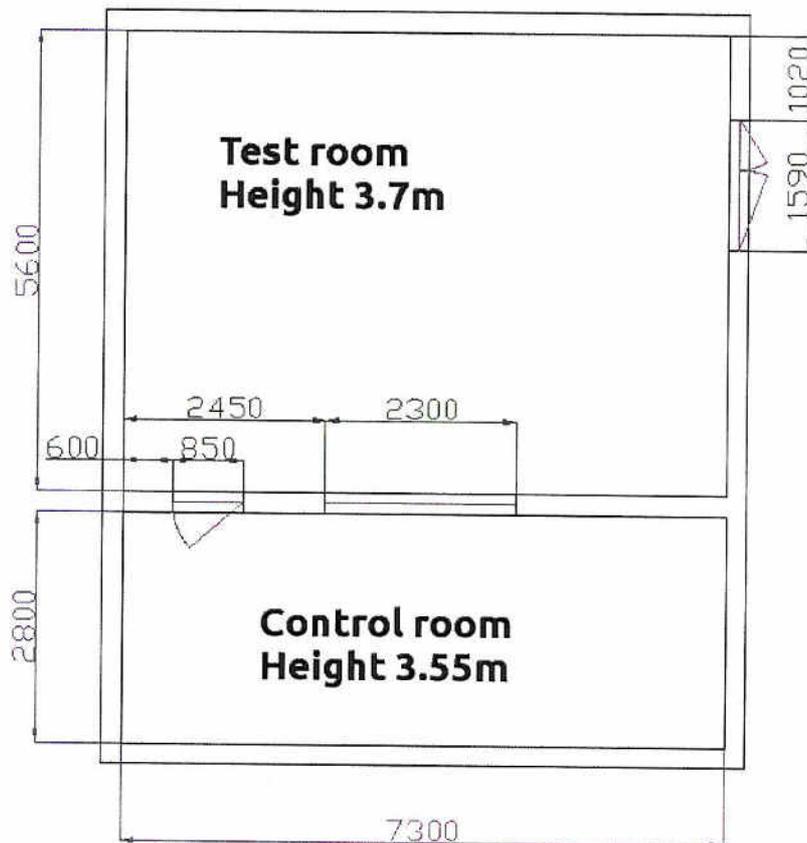


Figure 2 – Brake dynamometer location

2. BOSMAL media availability

BOSMAL media parameters available now on site:

- power supply: 400 V \pm 5%, 230 V \pm 5%;
- compressed air: max. 6 bar;
- cooling water: 2.5 bar, temperature max. 35°C.

Contractor should provide additional equipment, if necessary, required to connect into BOSMAL's media infrastructure.

3. Requirements for the Brake dynamometer installation:

- The Brake dynamometer has to be installed in existing rooms in BOSMAL seen in §2 drawing number 2.