

APPENDIX 5

BRAKE DYNAMOMETER verification requirements, both at the Contractor's and BOSMAL's sites.

I LOCATION of temperature sensors during the tests

The location of a temperature sensor inside a friction lining is shown in Fig. 1.

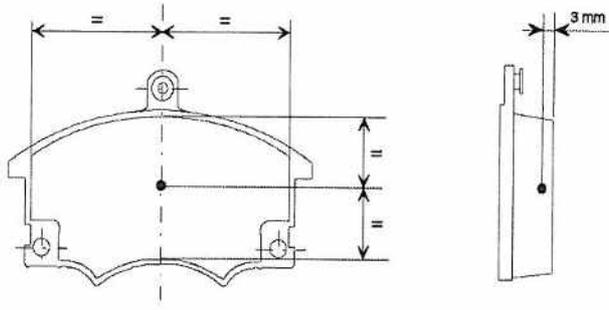


Fig. 1

The location of a temperature sensor inside a not-ventilated brake disc before the running-in test is shown in Fig. 2.

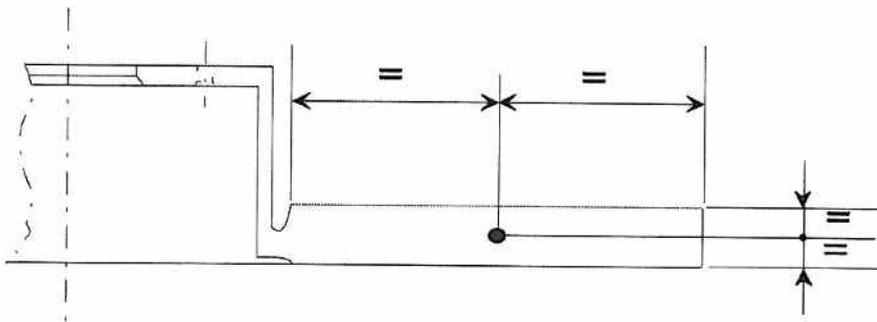


Fig. 2

The location of a temperature sensor inside a ventilated brake disc before a running-in test is shown in Fig. 3.

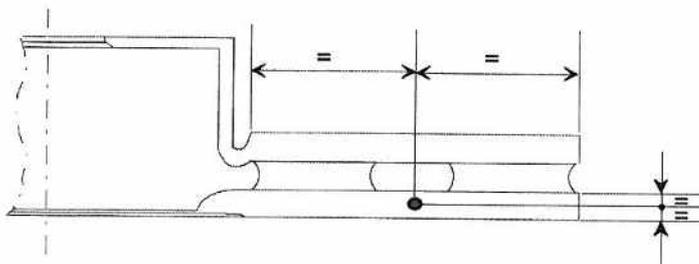


Fig. 3